

LRO3 Alkaline Dry Battery

Brief Datasheet


1 BASIC SPECIFICATION

Nominal capacity (under 20Ω load to 0.9V end-point voltage, at +20°C)	1200mAh	
Nominal voltage	1.5V	
Open-Circuit Voltage	Initial	1.55V or higher
	After 12 months	1.50V or higher
Closed-Circuit Voltage	Initial	1.50V or higher
	After 12 months	1.46V or higher
Short-Circuit Current (A)	Initial	6.0A or Higher
	After 12 Months	4.0A or Higher
Weight	12g	

2 DISCHARGE CAPACITY (20±2°C, RH:45%-75%)

Load(Ω)	3.6	5.1	10	20	75
Discharge mode	15S/min, 24h/day	4min/h, 8h/d	1h/d	24h/d	4h/d
End Voltage	0.9V	0.9V	0.9V	0.9V	0.9V
Initial	Over 550 cycles	Over 180mins	Over 7.0h	Over 16.5h	Over 55h

3 DIMENSION

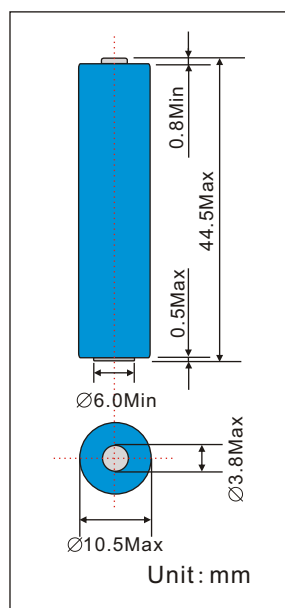

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.