



NC-AAA400-T *Brief Datasheet*

Nickel Cadmium Battery

1 Dimension


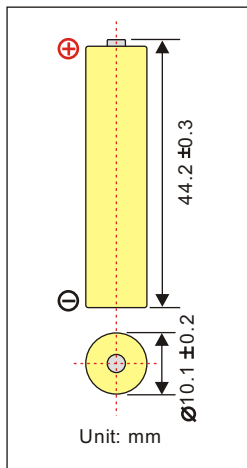


3 Electrical Characteristics

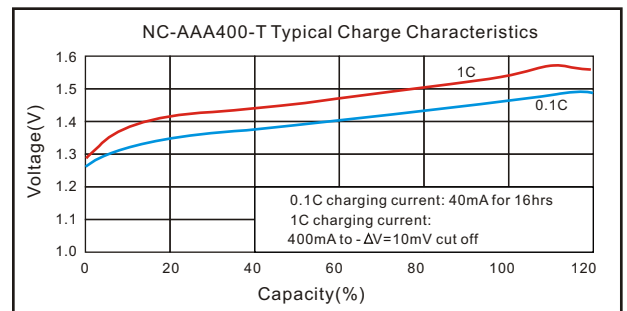

2 Basic Specification

Nominal Voltage		1.2V	
Nominal Capacity*	Typical	400mAh (0.2C discharge)	
	Minimum	350mAh (0.2C discharge)	
Charge	Standard	40mA for 16hrs	
	Fast	400mA for Approx.90mins	
Internal Impedance		$\leq 45\text{mohms}$	
Life Cycles		500 cycles	
Operation Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	<1year	-10°C to 30°C
<3month		-10°C to 40°C	
Discharge cut-off voltage		1.0V	
Weight		Approx. 13g	

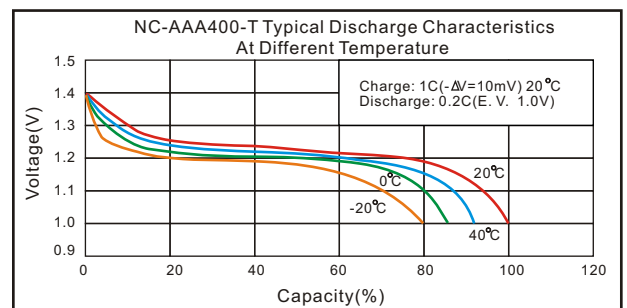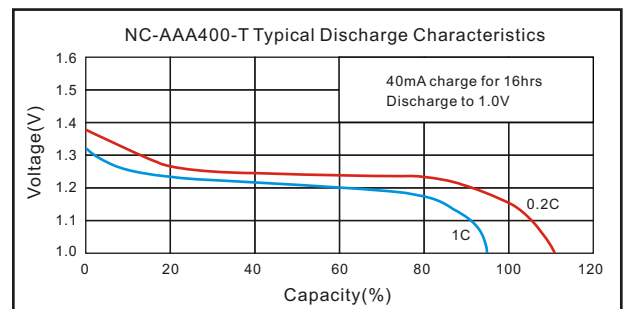

Note:*Typical values relative to cells stored for less than 3 months or less at 30°C max.

*After charging at 0.1C for 16 hours.

*We recommend cells or batteries are charged once every 3 months.

Ni-Cd

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.